



OVERHEAD DOORS

ROLLING STEEL FIRE RATED

Key Features

- Galvanized Steel Curtain with Interlocking Roll-Formed Slats
- Polyester Enamel-Finished Galvanized Steel Hood
- Powder-Coated Structural Steel Guides
- Back-to-Back Powder-Coated Steel Bottom Bar
- Alarm-Activated Automatic Operator

Major Benefits

- **Advanced Protection:**
Automatic fire door system activates thermally or electrically to contain fire hazards and smoke spreading.
- **Proven Durability:**
Galvanized steel and powder-coated construction, including corrosion-resistant hardware options, deliver a prolonged product lifecycle.
- **Reliable Safety:**
UL-listed fire protection ratings provide security for 45 minutes, 90 minutes, or 3 to 4 hours.

ROLLING STEEL FIRE RATED

General Specifications

Max Width / Height	34' x 40'
Insulation Material	Polyester
Standard Mounting	Face of wall
Operation	Motor or hand chain
Spring Cycles	50,000
Wather Seals	Bottom and exterior curtain-side guides
Bottom Bar	Primed steel with vinyl weatherseal
Electrical Motor	208V / 230V / 460V - 3 Ph 115V / 230V - 1Ph
Adicional features	Safety-edge / reflective photo eye / touchless activation
High-Spring Cycles	100,000
Rolling Door Protector	Physical barrier at the top of the door that absorbs impacts.

Slats Construction Options

Steel

Exterior Slat Gauge 24, 24, 24, 24

Interior Slat Gauge 24, 22, 20, 18

Stainless Steel

Exterior / Interior Slat Gauge 22

Curtain Finishes

White


Gray

Tan


Brown

Standard Hood, Fascia and Cover


1 Two-sided Hood *

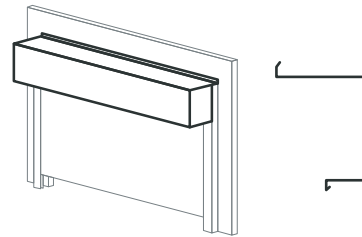


2 Three-sided Square Hood *

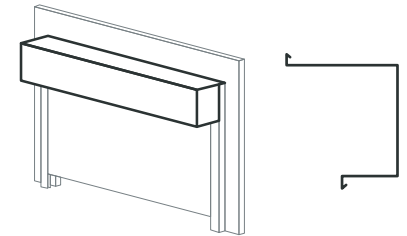


3 Three-sided Sloped Hood *

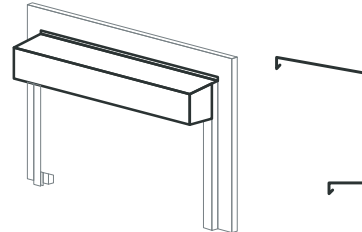

4 D-shaped Hood

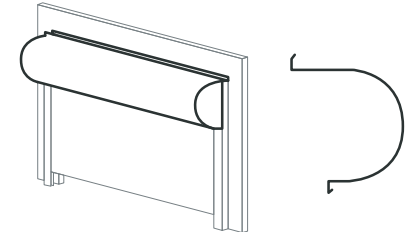

*One-sided Fascial Option



Mounting Options

Fire doors can be installed face of wall or between jambs on an interior or exterior wall. Acceptable wall types include masonry, structural steel jambs and drywall construction with structural steel or wood studs.