ALLMARK DOOR
All Doors. All Docks. All Service. All the Time.

1-(800)-417-9995

High Speed Doors

FOODMASTER

Key Features

- Nylon-Reinforced Vinyl or Polyurethane Curtain
- Galvanized or Stainless Steel Hood and Guide Tracks
- Direct-Drive Panel Operation
- Touchless Sensor Activation
- NEMA 4X Control Station

Major Benefits

- **Proven Performance:**
  Operating speeds of up to 80 inches per second reduce harmful air infiltration within processing environments.
- **Enhanced Sanitation:**
  Stainless steel construction and food-grade materials ensure sanitary efficiency for rigorous wash-down applications.
- **Exceptional Durability:**
  Heavy-duty steel guide tracks and a 2 to 5-year warranty on components, materials, and workmanship deliver low cost of ownership.

GET A QUOTE NOW 1-(800)-417-9995

High Speed Doors

FOODMASTER

General Specifications

Application	Interior
Maximum Size	14’ W x 16’ H
Opening | Closing Speed	80"/ Sec | 30”/ Sec
Door Operation	Direct-drive motor
Side Frame / Cover	Galvanized or stainless steel
Curtain Material	Nylon-reinforced puncture-resistant PVC or FDA-approved white polyurethane
Vision	One full-width, clear PVC starting approximately 52” off floor
Control Panel	Automatic operation with buttons for opening, closing, stop, and emergency stop functions. • Panel mounted on/off indicator light • NEMA 4X enclosure
Power Supply	208/230/480 VAC | 3HP / 60 Hz.
Power Unit Mounting	Motor can be mounted right or left side of the door.
Safety Devices	Light curtains
Emergency Opening	Crank / Chain hoist / UPS battery pack
Options	

Activation Devices

• Floor Loops



• Pull Cord

• Falcon Eye Motion Sensors



• Laser Scanner



Technical Drawing

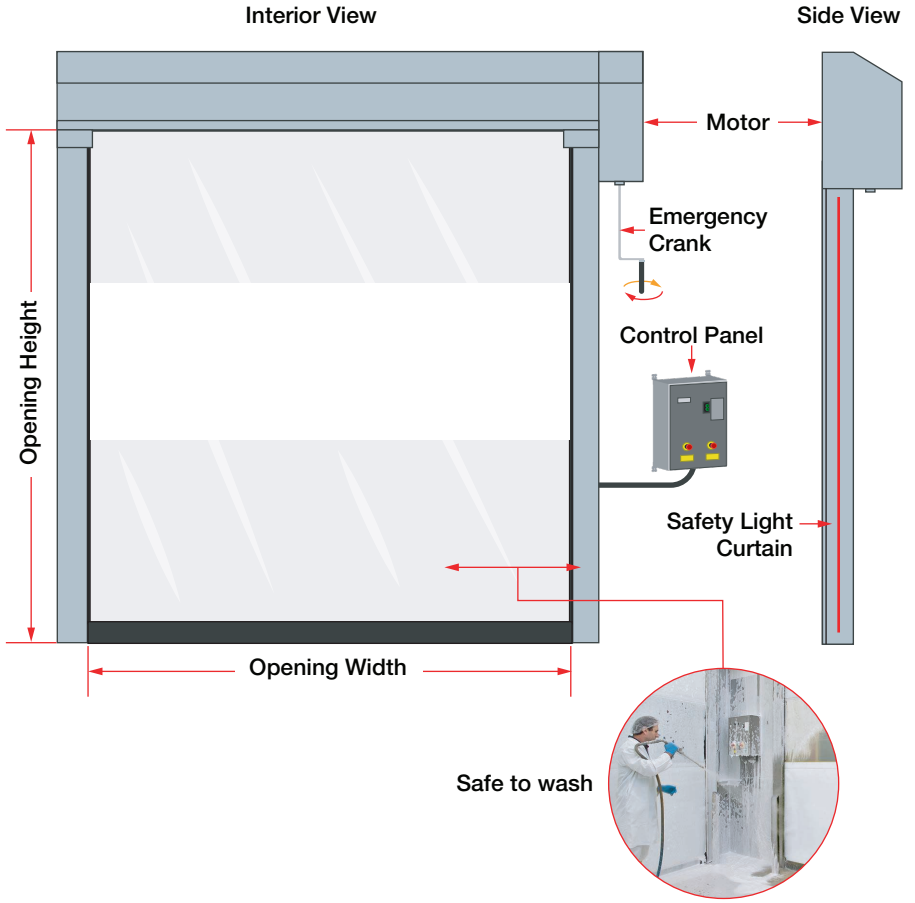

Curtain Colors

6 Standard Colors: White, Yellow, Orange, Red, Dark Blue and Gray