



Pedestrian Doors TRAFFIC DOOR

Key Features

- Rotationally-Molded Polyethylene Door Panel
- Insulated Non-CFC Urethane Core
- Internally-Reinforced Tubular Steel
- Durable and USDA-Approved Gasketing
- Double-Acting V-Cam Hinging System

Major Benefits

Proven Performance:

Impactable design and long service life delivers on the daily rigors of forklift, refrigerated and wash-down applications.

Enhanced Sanitation:

Seamless and corrosion-resistant panel ensures superior wash-down efficiency and is USDA-approved.

Superior Durability:


Rotationally-molded polyethylene construction is up to five times more puncture-resistant than alternative materials.

TRAFFIC DOOR

General Specifications

Sizes	Up to 10' x 10'
Applications	Retail & Supermarket, Industrial & Commercial, Secondary Cooler & Freezer, and Wash-down.
Thickness	$1-7/_8$ " Overall thickness, $1/_4$ " thick skin
Material	Rotationally-molded polyethylene
Insulated Core	The foamed-in-place Non-CFC urethane core (perma- nently bonded to the outer surface) does not break down when impacted, provides noise control and excellent insulation with an R factor of 10.83.
Hinge	V-Cam hinge system
Available Options	180° x 90° hardware, teardrop bumpers, impact / kick plates, lower hinge guards, spring assist, locking devices, and window options.
Windows Size	¹ / ₈ " Polycarbonate, black frame

Colors

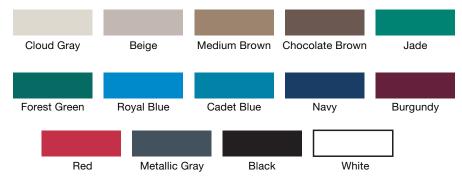

Product Overview

