

High Speed Doors SLIDE DOOR

## WIEJAK® FAST-TRACK™

### Key Features

- Flexible PVC or Thick Polyester Double-Leaf Curtain
- Corrosion-Resistant Multi-Composite Frame
- Flush Mounted Photo Sensors
- Direct Drive Panel Operation
- IP56-Rated Control Station

### Major Benefits

- **Superior Performance:**  
Operating speeds of up to 98 inches per second reduce harmful air infiltration within controlled environments.
- **Advanced Safety:**  
Horizontal sliding mechanism provides faster protection against contaminants and minimizes the probability of collisions.
- **Energy-Efficiency:**  
Fast opening speeds and superior sealing capability keeps temperatures consistent and reduces energy waste.






## General Specifications

Maximum Sizes	13' W x 13' H (4 m x 4 m)
Opening / Closing Speed	Up to 2.5 m/s / Up to 1.0 m/s
Door Operation	Direct-drive motor.
Side frame	Corrosion-resistant multi-composite frame.
Control Panel	Automatic operation with buttons for opening, closing, stop, and emergency stop functions. • Protection Class IP56
Curtain Type	Flexible PVC or 1 mm thick polyester UV protected multi-layer cross woven with flexible weighted soft lateral edge.
Power Supply	208/230/480 VAC   3HP / 60 Hz.
Safety Device	Reverse-sensing edge


### Activation Devices

- Floor Loops
- Pull Cord
- Falcon Eye Motion Sensors
- Laser Scanner




## Curtain Colors

Available colors of the curtains from the RAL palette.

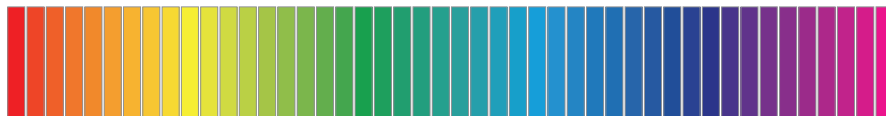

Ask dealer about custom color options. \*Special colors may have an additional fee.

## Technical Drawing

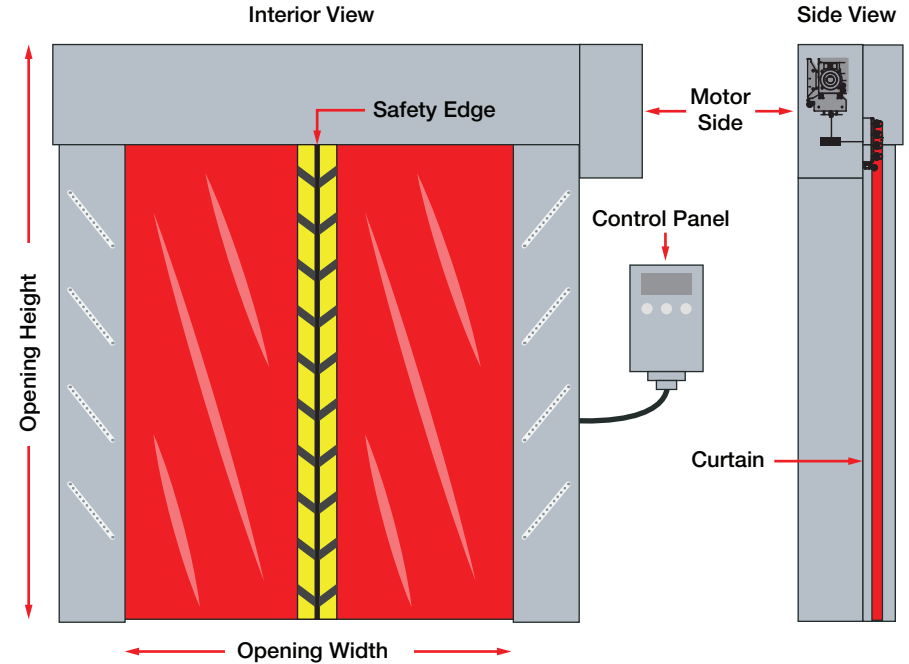

## Window Panel Options

