





Key Features

- Vinyl-Coated Polyester Screen
- Aluminum Side Tracks
- Soft-Bottom Foam Cushion
- Angled Weather Stripping
- Spring-Loaded Roll Tube

Major Benefits

Proven Safety:

Engineered for warehouse and loading dock openings at packaging and processing facilities that rely on strict pest control.

■ Reliable Functionality:

Heavy-duty spring-loaded roll tube and pull-down handles are designed for user-friendly opening and closing cycles.


Exceptional Durability:

Tight-weave mesh and foam bottom cushion ensures long-lasting performance in demanding industrial environments.


■ Technical Specifications

Maximum Sizes	12' W (3658 mm) x 12' H (3658 mm).
Head Room	 6" to 8" (152 to 203 mm) will be used for header mount applications. 8" (203 mm) is needed above the door opening for wall mount applications.
Tracks	 2" (50.8 mm) wide and 2" (50.8 mm) deep aluminum tracks. Header mount will take up to 2 ¹/₂" (63.5 mm) of side room on each side.
Weather Stripping	Weather stripping is angled to provide a tighter seal, preventing bugs and insects easy access or entry.
Screen Material	 17" x 11"(431 mm x 279 mm) high strength, vinyl-coated polyester screen material. Reinforced in yellow safety vinyl windbars.
Options	 Fiberglass windbars are available for doors that require added stability. Brush Seal Chain Hoist
Warranty	One year warranty on parts.

■ Mounting Options

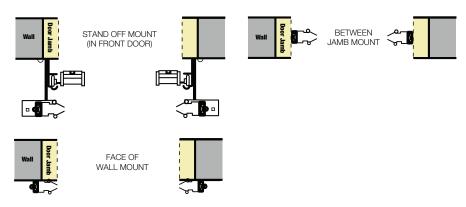

■ Technical Drawing

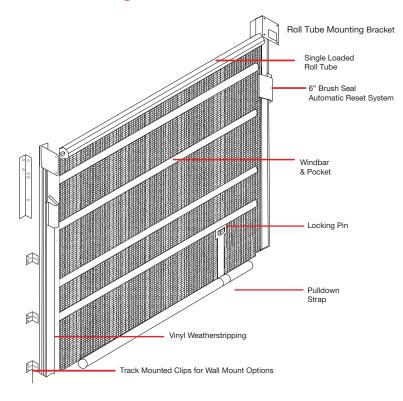

■ Available Colors

Standard

