

Rubber Doors

PERFORMAX[®] MAXDOCK[™]

Key Features

- Heavy-Duty Impactable Rubber Curtain
- 1,000,000 Cycle-Rated Drive System
- 3 ¼ Inch Galvanized Steel Guides
- NEMA 4 Variable Programmable Control Panel
- Wireless Safety Edge and Reflective Photo Eyes

Major Benefits

- **Low Maintenance:**
Rugged, impactable design virtually eliminates downtime and repair costs associated with collision damage.
- **Enhanced Safety:**
Groundbreaking springless engineering and tight-sealing properties deliver seamless and secure loading dock operations.
- **Premium Durability:**
Patented RhinoMax[™] rubber curtain comes standard with a limited lifetime warranty.



General Specifications

Standart Features

Opening Speed	Up to 12" per second
Max Size	12'x12'
Drive	Direct Drive Single Speed Motor
Curtain	1/4" Reinforced Rubber Curtain
Guide Width	3 1/2" Galvanized Guides
Safety Devices	Inertia Brake, Reflective Photo Eye


Optional Features

Electrical	460 Volt - 3 Phase 230 Volt - 3 Phase
Mechanical	Hood & Motor Cover, 2" High Visibility Strip 14"x14" Vision Windows, Manual Chain Hoist Heavy Duty Powder Coated Guides.

Safety Devices

- Electric Safety Reversing Edge.

- Barrier System

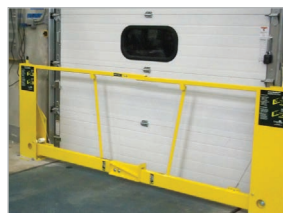


- Bollards



- Light




Technical Drawing

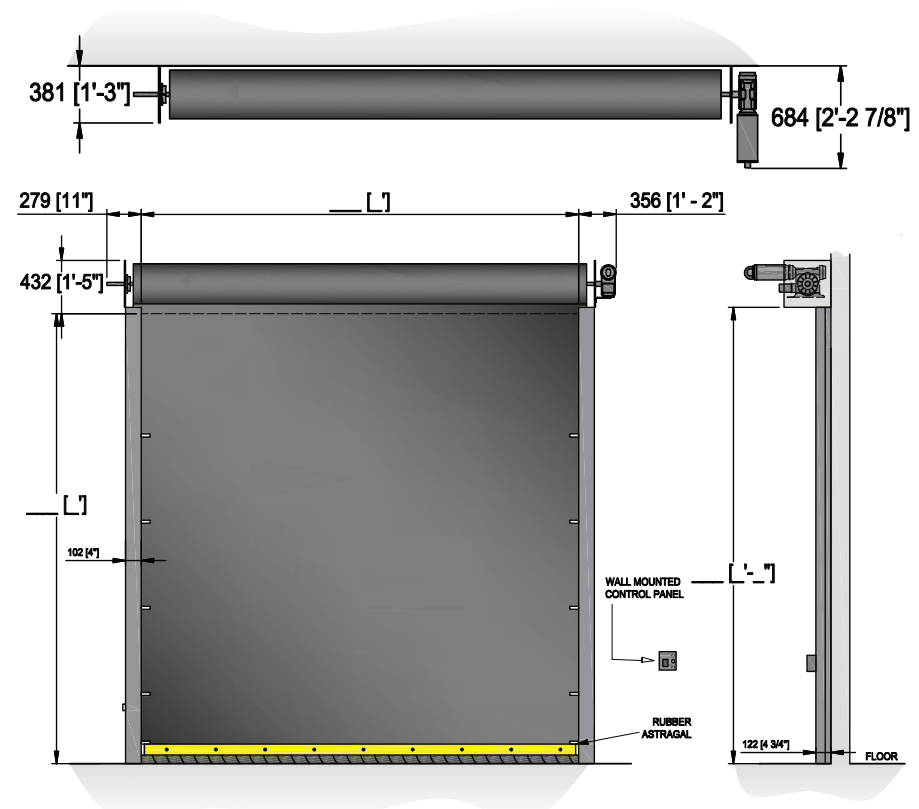

Curtain Colors


Black Standard



Blue



Orange



Gray

