





# **Key Features**

- Pre-Painted Galvanized Steel Curtain
- Foamed-In-Place Insulated Sections
- Insulated Custom Window Options
- Impact-Adjustable Bottom Sections
- Manual Chain Hoist or Automatic Operator

# **Major Benefits**

#### Advanced Performance:

High R-Value and eco-friendly insulation properties prevent heat and cold air transfers, delivering consistent energy savings.

#### Reliable Efficiency:

Solid steel construction and heavy-duty hardware deliver smooth operation, low maintenance, and a long lifecycle.

#### Proven Security:


Customizable vision panels provide natural light penetration while allowing an unobstructed view of traffic conditions.



# **■ General Specifications**


Steel Embossment	Stucco
Door Thickness	1-3/8" / 1"(2.5cm) / 2" (5.1cm) / 3"(7.6cm)
Insulation	Polystyrene
Max / Min. Width	20'2", 24'2", 40'2" / 5', 6'
Max / Min. Weight	16'1", 26'1" / 7'
Paint finish Warranty	10 years


# **■ Track Lift Options**






#### **■ Construction**





# **■ Panel Design**



24"x12"



# Window Options







Tempered Insulated Glass With Black Or White Frame\*




Tempered Insulated
With Black Frame\*



Double Insulated Acrylic Windows With Black Frame\*


## **■ Colors**

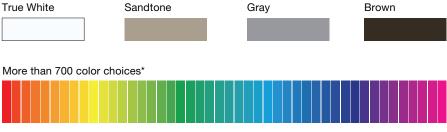

<sup>\*</sup>Ask dealer about custom color options. Price upcharge may apply.

<sup>\*</sup>Ask dealer for more details



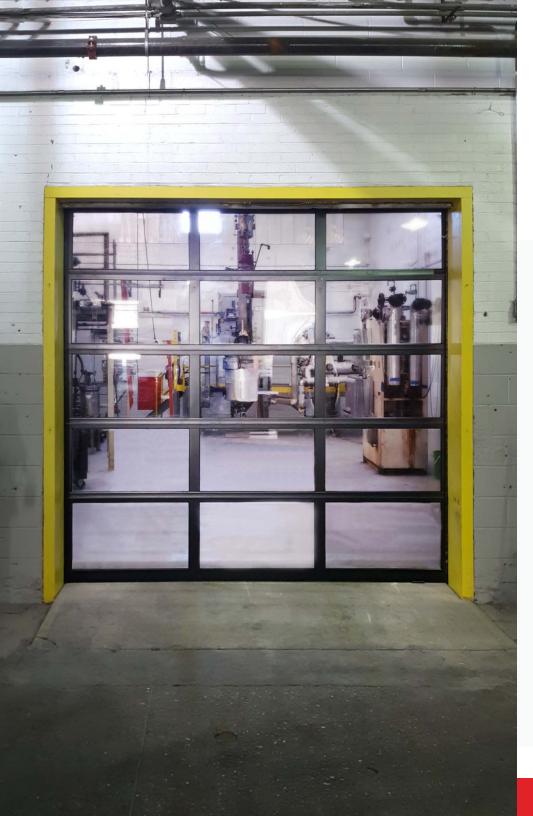



# **ALUMINUM**

# **Key Features**

- Extruded Aluminum Rails and Stiles
- High-Visibility Equal Glass Height Sections
- Protective Bulb Seal and Bottom Weather Seal
- Custom Glazing and Insulated Panel Options
- Manual Chain Hoist or Automatic Operator

## **Major Benefits**

## Proven Safety:

Full-view vision panels provide natural light penetration while allowing an unobstructed view of traffic conditions.

#### Reliable Strength:

2-inch thick extruded commercial-grade aluminum frame ensures durability, low maintenance, and corrosion-resistance.

#### Custom Functionality:

Special configurations provide a modern style for automotive stations, parking garages, sports complexes, and more.

# **■ Technical Specifications**

Material	Aluminum
Construction Layers	Single
Door Thickness	2" (5.1cm)
Section Heights	Varies by door height
Max. / Min. Door Width	20' 2" (in 1" increments) / 2' 0"
Max. / Min. Door Height	20' 1" / 6' 0"
Clearview Strut System	Only required for doors $\geq$ 16 '
Finish Warranty	5 Years / 3 Years
Glass Warranty	1 Year
Glazing Options	Clear / Obscure / Green / Bronze / Gray / Greylite / Frost / Snow / Whiteout / Black Ice

# Door Design





8'3"-16'2" Wide - 2 Panels




16'3" - 20'2" Wide - 3 Panels



Up to 10'2" Wide - 2 Panels




10'3"-16'2" Wide - 3 Panels



16'3"-20'2" Wide - 4 Panels



# **■ Panel Options**

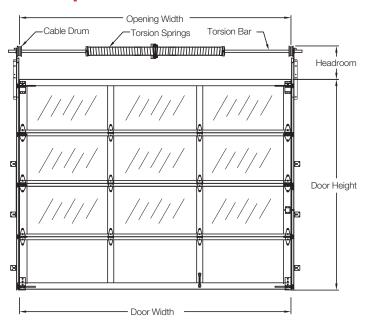

# **■ Panel Options**



#### **■ Colors**

#### Standard



#### Special Order

Ask dealer about special color options. Price upcharge may apply.