

Pedestrian Doors FRP SERIES

EVERLINE® STRONGDOR®

Key Features

- Fiberglass-Reinforced Pebble-Grain Panel
- Aluminum-Reinforced Perimeter Stiles and Rails
- Mitered Corner Joints Secured By Angled Blocks
- Thermally-Insulated Urethane Core Material
- UL-Certified Fire-Rated Door Frame

Major Benefits

- **Exceptional Durability:**
Withstands heavy traffic, abuse and vandalism as well as harsh environmental conditions with ease.
- **Low Maintenance:**
Scratch and stain-resistant pebble-grain exterior looks great for years, requiring only soap and water to clean.
- **Application-Specific:**
An informed choice for challenging environments such as public buildings and service entrances that are prone to damage.



General Specifications

Custom Sizes	Up to 80" (2032 mm) x 216" (5486 mm)
Face Sheets	Resistant to dents, scratches, scuffs, paint, ink and fading.
Leaf Options	Singles & Double Leaf
Foam	5 lbs per cubic foot density.
Stiles and Rails	Configured for maximum strength.
Urethane Core	Ensures impact resistance, flexural strength and thermal insulation.
Thickness	1 ³ / ₄ " (44.5 mm) thick

Colors & Finishes



Vision Panel and Louver Options


Factory installed vision panels and louvers ensure proper glazing materials are used to conform with fire and safety building codes.



Vision Panel
10" x 10"
254 x 254 mm



Vision Panel
24" x 30"
610 x 762 mm

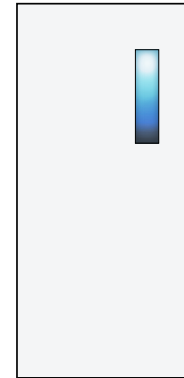


Vision Panel
5" x 20"
127 x 508 mm



Vision Panel
3" x 33"
76.2 x 838 mm



Louvre Panel
12" x 12"
305 x 305 mm

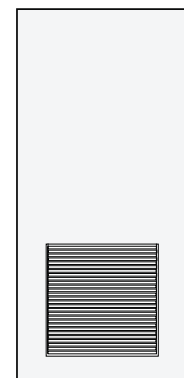

Louvre Panel
24" x 24"
610 x 610 mm