

Pedestrian Doors BUMPER DOOR
EVERLINE® TRAFFIC

Key Features

- Rotationally-Molded Polyethylene Door Panel
- Insulated Non-CFC Urethane Core
- Internally-Reinforced Tubular Steel
- Durable and USDA-Approved Gasketing
- Double-Acting V-Cam Hinging System
- Dual Bumper Panels

Major Benefits


- **Proven Performance:**
Impactable design and long service life delivers on the daily rigors of forklift, refrigerated and wash-down applications.
- **Enhanced Sanitation:**
Seamless and corrosion-resistant panel ensures superior wash-down efficiency and is USDA-approved.
- **Superior Durability:**
Rotationally-molded polyethylene construction is up to five times more puncture-resistant than alternative materials.



General Specifications

Sizes	Up to 10' x 10'
Applications	Retail & Supermarket, Industrial & Commercial, Secondary Cooler & Freezer, and Wash-down.
Thickness	1-7/8" Overall thickness, 1/4" thick skin
Material	Rotationally-molded polyethylene
Insulated Core	The foamed-in-place Non-CFC urethane core (permanently bonded to the outer surface) does not break down when impacted, provides noise control and excellent insulation with an R factor of 10.83.
Hinge	V-Cam hinge system (Stainless Steel)
Available Options	180° x 90° hardware, teardrop bumpers, impact / kick plates, lower hinge guards, spring assist, locking devices, and window options.
Windows Size	1/8" Polycarbonate, black frame
Back Edge	Reinforced with an 11 gauge stainless steel spine

Colors

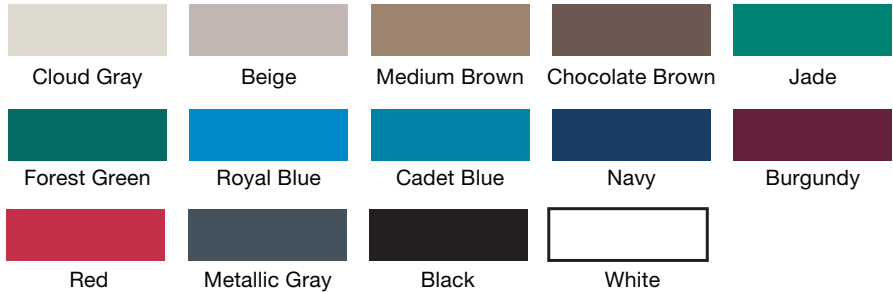

Product Overview

