



Pedestrian Doors SEAMLESS FIBERGLASS
EVERLINE® FIBER-TEK™

Key Features

- Impervious, Corrosion-Resistant Fiberglass Panel
- Seamless Fiberglass-Reinforced Structural Joints
- Seamless Fiberglass-Reinforced Hardware Locations
- Composite Urethane Foam Core Material
- UL-Certified Fire-Rated Door Frame

Major Benefits

- **Compliance-Proof:**
Impervious fiberglass technology delivers extreme sanitation and corrosion-resistance in controlled environments.
- **Advanced Performance:**
Guaranteed to withstand frequent washdowns and cleaning regiments using harsh chemicals.
- **Premium Durability:**
Backed by a lifetime warranty against rotting, warping, peeling, and rusting under the harshest conditions.




General Specifications

Sizes	Custom
Thickness	1 ³ / ₄ " (44.5 mm) thick
Standard Finish	Polyurethane Semi-Gloss
Core Assembly	Stiles and rails are securely bonded to core. 1 ¹ / ₂ " (38.1 mm) square pultruded fiberglass tubes. A polyester-based resin filled with 1/4" (6.35 mm) chopped glass strands and aerosil is used for reinforcements and corner blocks.
Core Material	Urethane foam or Mineral core
UL Approved	20 to 90-minute positive-pressure fiberglass doors and frames.


Vision Panel and Louver Options

Factory installed vision panels and louvers ensure proper glazing materials are used to conform with fire and safety building codes.

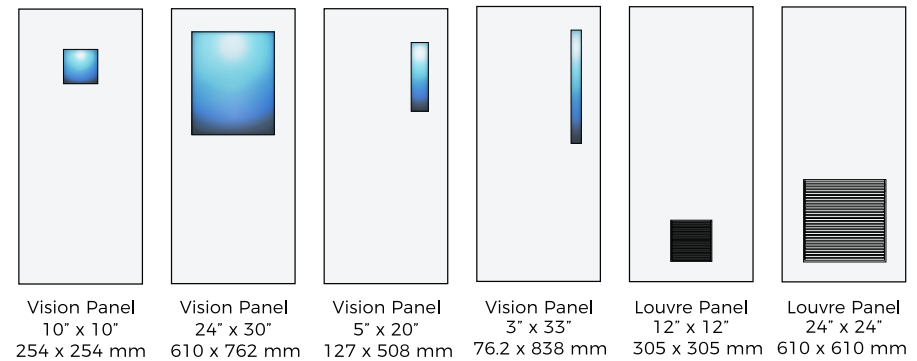

Colors & Finishes

Standard Colors



Special Colors



25 colors available. Standard matte coat finish. A polyurethane finish in high sheen or low sheen is available upon request.

Door Glazing Options

